


Beam Clamps

BCU Universal Beam Clamps



- Range of 3t and 5t
- Versatile rigging point for hoisting equipment
- Highly flexible for lifting, pulling or as a semi-permanent anchor point
- For both vertical and side loading applications
- Full rated capacity at any lifting angle
- Operating temperature -50°C to +50°C
- 4:1 factor of safety

Product Code	Model	Capacity (t)	Dimensions (mm)											Weight (kg)
			A	B	C	D	E	F	G	H	J	K	L	
H030110301	BCU-0300	3.0	387	60	70	63	32	235	100	25.4	28	20	125-204	15.5
H030110501	BCU-0500	5.0	524	70	74	72	32	270	120	25.4	38	24	125-305	27.0
H030111001	BCU-1000	10.0	524	70	75	82	32	278	120	25.4	38	25	125-305	31

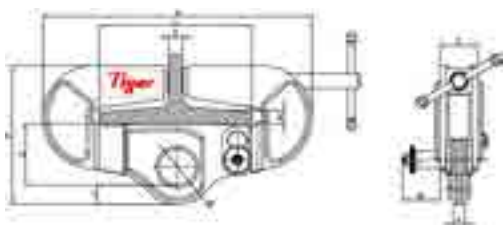

Warning: Do not use this equipment for lifting flat plate sections

BCA Adjustable Angle Clamps



- Range of 1t and 3t
- Versatile rigging point for hoisting equipment
- V shaped clamping jaws ensure safe, secure grip
- Accommodates a wide range of steel angle sections
- Integrated adjusting screw spindle
- Operating temperature -50°C to +50°C
- 4:1 factor of safety
- Can be used up to a maximum of 15° from the vertical

Product Code	Model	Capacity (t)	Dimensions (mm)										Weight (kg)
			A	B	C	D	E	G	H	J	K		
H030120101	BCA-0100	1.0	6	76.5	81	83	206	15	258	16	38-101	5.5	
H030120301	BCA-0300	3.0	10	106.5	112	104	343	25.4	490	22	101-203	23.5	

