

# Beam Clamps

## BCF Beam Clamps




- Range from 1t to 20t
- Versatile rigging point for hoisting equipment
- Suitable for pulling and lifting at angles across the beam
- 90° side loading with no de-ration (100% WLL)
- 15° cross loading with no de-ration (100% WLL)
- Evenly distributed loads achieved through maximum jaw surface area
- Operating temperature -50°C to +50°C
- 4:1 factor of safety

Product Code	Model	Capacity (t)	Dimensions (mm)											Weight (kg)
			A	B	C	D	E	F	H	J	K	L	T	
H030100101	BCF-0100	1.0	75-195	206-321	105	20	190	300-266	16	21	80	84	6	5.5
H030100201	BCF-0200	2.0	75-195	206-321	105	20	190	311-276	18	21	88	95	8	6.5
H030100304	BCF-0300	3.0	100-350	223-476	140	25	270	418-344	22	27	110	105	10	12.0
H030100303	BCF-030S	3.0	75-190	216-325	140	20	190	310-271	22	27	110	105	10	9.5
H030100506	BCF-0500	5.0	100-310	223-438	140	25	286	424-368	27	27	124	111	12	14.5
H030100503	BCF-050S	5.0	75-190	216-325	140	20	190	315-276	27	27	124	111	12	11.0
H030101004	BCF-1000	10.0	120-350	282-511	210	30	314	460-389	32	37	83	120	16	26.5
H030101504	BCF-1500	15.0	203-457	463-742	250	36	416	644-558	38	43.5	99	146	20	76.0
H030102004	BCF-2000	20.0	203-457	471-766	300	50	416	697-609	45	49	126	180	25	100.0

Larger sizes available on request

### Capacities 1t, 2t, 3t, 5t

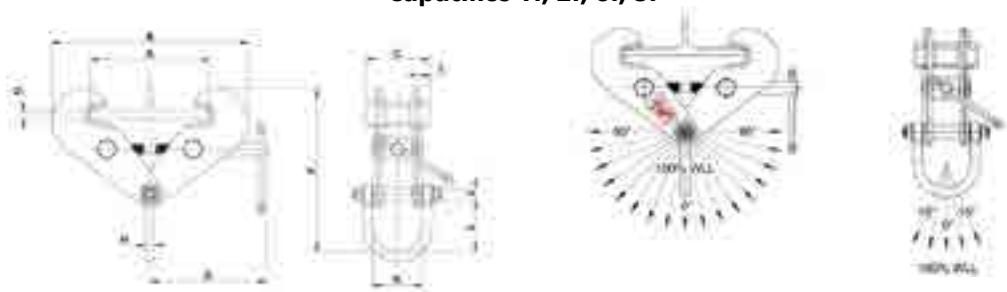

### Capacities 10t, 15t, 20t

